

TKG-104-MB-IP68-GREY

INDUPROOF™
Advanced



TKG-104-MB-IP68-GREY

- Ergonomically designed silicone-covered keyboard with 104 keys
- Integrated pointing device
- Positive tactile feedback
- VESA boreholes (75 x 75 mm)
- IP68 sealing, can be submerged in liquid
- Special coating for excellent mechanical and chemical resistance
- PS/2 or USB interface available

SPECIFICATION

Number of keys: 104
 Keyswitch technology: carbon contact technology
 Operating force: 2 N
 Switch travel: 1.0 mm
 Switching cycles: approx. 2 mil. (per key)
 Protection level (max): IP68
 Housing design: plastic housing
 Material (surface): Silicone
 Material (bottom panel): plastic
 Interfaces: PS/2; USB
 Operating temperature: 0 °C to +70 °C
 Storage temperature: -25 °C to +80 °C
 Dimensions: 340 x 165 x 16.3 mm
 Weight: approx. 800 g





TECHNICAL SPECIFICATION MOUSE CURSOR (Mouse Button)

Operating principle: hall-sensor
 Resolution: 800 dpi

Kat.n.r. / Cat.no.	Produktbezeichnung / Product description	Schutzgrad / Protection level	Abmessungen / Dimensions (mm)
KG17225	TKG-104-MB-IP68-GREY-PS/2-DE	IP68	340 x 165 x 18,4 mm
KG17226	TKG-104-MB-IP68-GREY-PS/2-US	IP68	340 x 165 x 18,4 mm
KG17203	TKG-104-MB-IP68-GREY-USB-DE	IP68	340 x 165 x 18,4 mm
KG17204	TKG-104-MB-IP68-GREY-USB-US	IP68	340 x 165 x 18,4 mm

Andere Layouts, Konfigurationen und Schnittstellen auf Anfrage. / Other language versions / interfaces / configurations available on request.

TKG-104-MB-IP68-GREY

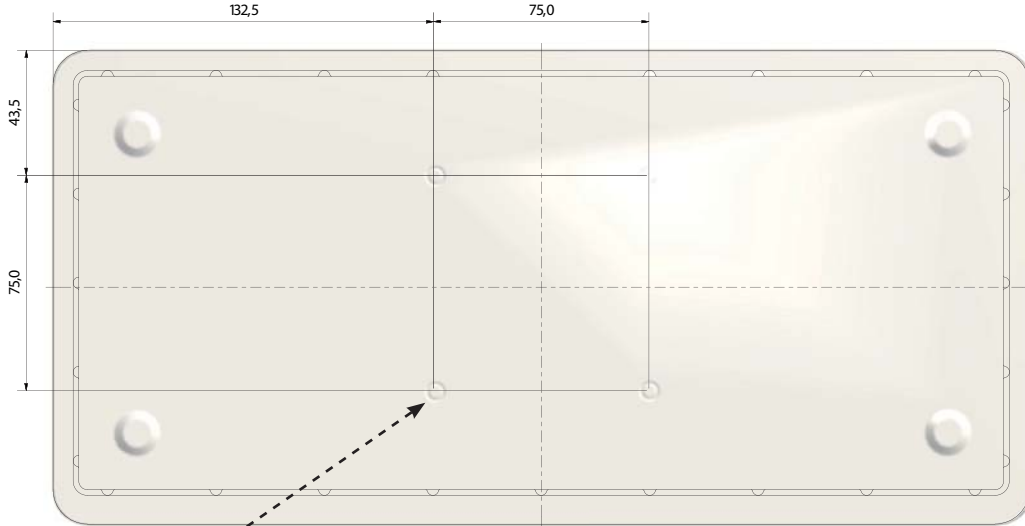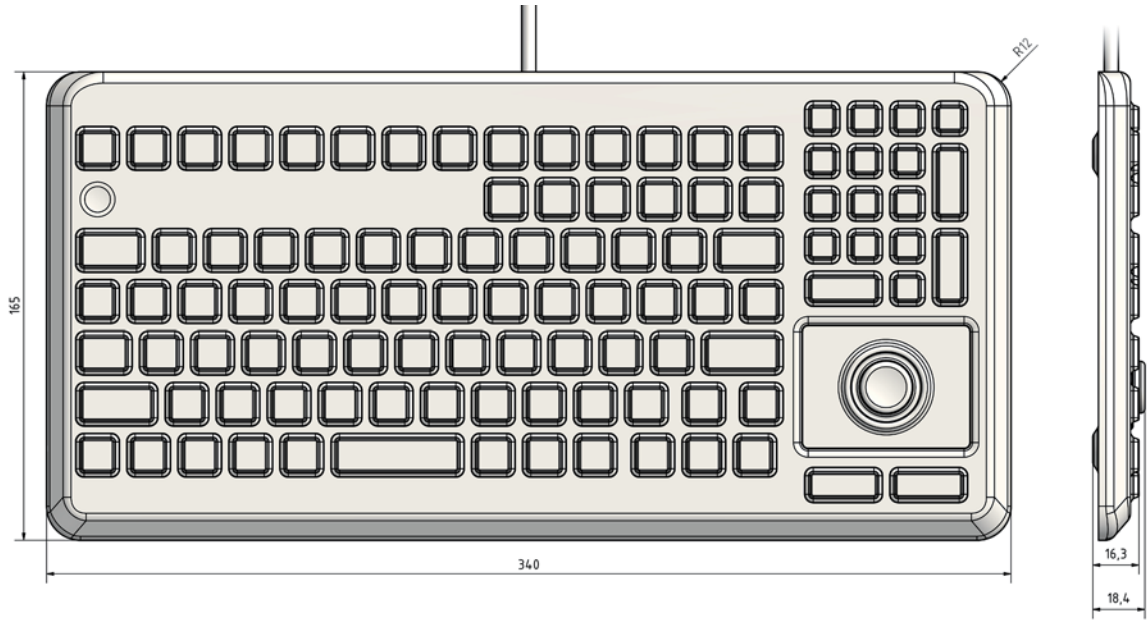


SPECIFICATION / OPTIONS / OPTIOT

- Rear side equipped for VESA mount (75 x 75 mm) with „push-out“ insert nuts for installing bolts
- The disengagable electronic system allows for a cleaning even while the system is running (ON/OFF Switch: push the button 3 sec.)



FI-Kieliversio

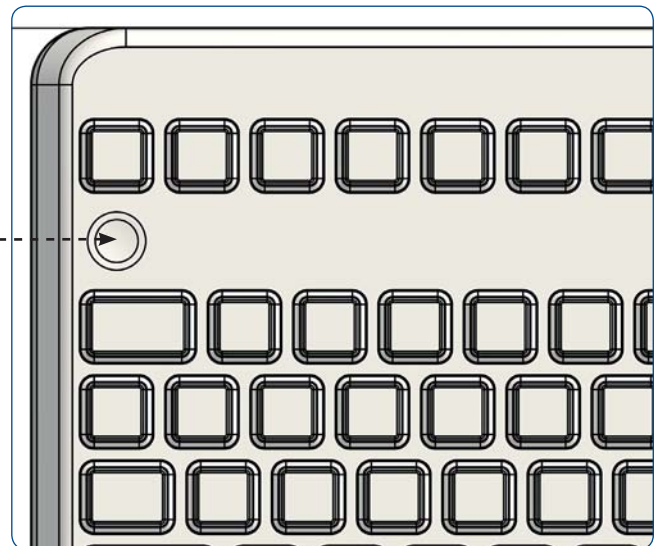

Version 012010

Änderungen und Irrtümer vorbehalten! / Errors and omissions exceptet

TKG-104-TOUCH-IP68-GREY

INDUPROOF™
Advanced



TKG-104-TOUCH-IP68-GREY

- Ergonomically designed silicone-covered keyboard with 104 keys
- Integrated pointing device
- Positive tactile feedback
- VESA boreholes (75 x 75 mm)
- IP68 sealing, can be submerged in liquid
- Special coating for excellent mechanical and chemical resistance
- PS/2 or USB interface available

SPECIFICATION

Number of keys:	104
Keyswitch technology:	carbon contact technology
Operating force:	2 N
Switch travel:	1.0 mm
Switching cycles:	approx. 2 mil. (per key)
Protection level (max):	IP68
Housing design:	plastic housing
Material (surface):	Silicone
Material (bottom panel):	plastic
Interfaces:	PS/2; USB
Operating temperature:	0 °C to +70 °C
Storage temperature:	-25 °C to +80 °C
Dimensions:	340 x 165 x 16.3 mm
Weight:	approx. 800 g

TECHNICAL SPECIFICATION TOUCHPAD

Operating principle:	capacitive
Resolution:	max. 500 dpi
Dimension:	65 x 59 mm
Sensing area:	59 x 42 mm





FI-Kieliversio

Kat.Nr. / Cat.No.	Produktbezeichnung / Product description	Schutzgrad / Protection level	Abmessungen / Dimensions (mm)
KG17223	TKG-104-TOUCH-IP68-GREY-PS/2-DE	IP68	340 x 165 x 16,3 mm
KG17224	TKG-104-TOUCH-IP68-GREY-PS/2-US	IP68	340 x 165 x 16,3 mm
KG17201	TKG-104-TOUCH-IP68-GREY-USB-DE	IP68	340 x 165 x 16,3 mm
KG17202	TKG-104-TOUCH-IP68-GREY-USB-US	IP68	340 x 165 x 16,3 mm

Andere Layouts, Konfigurationen und Schnittstellen auf Anfrage. / Other language versions / interfaces / configurations available on request.

TKG-104-TOUCH-IP68-GREY

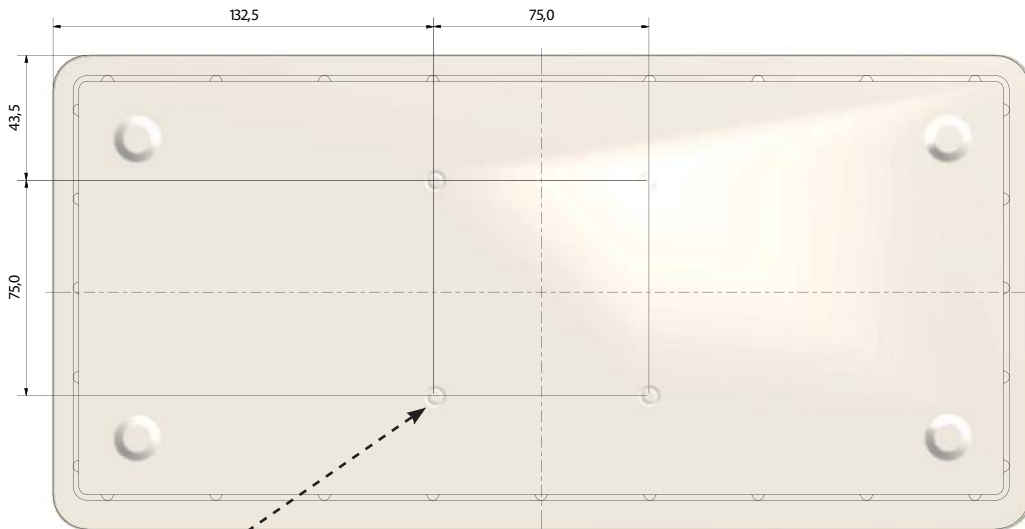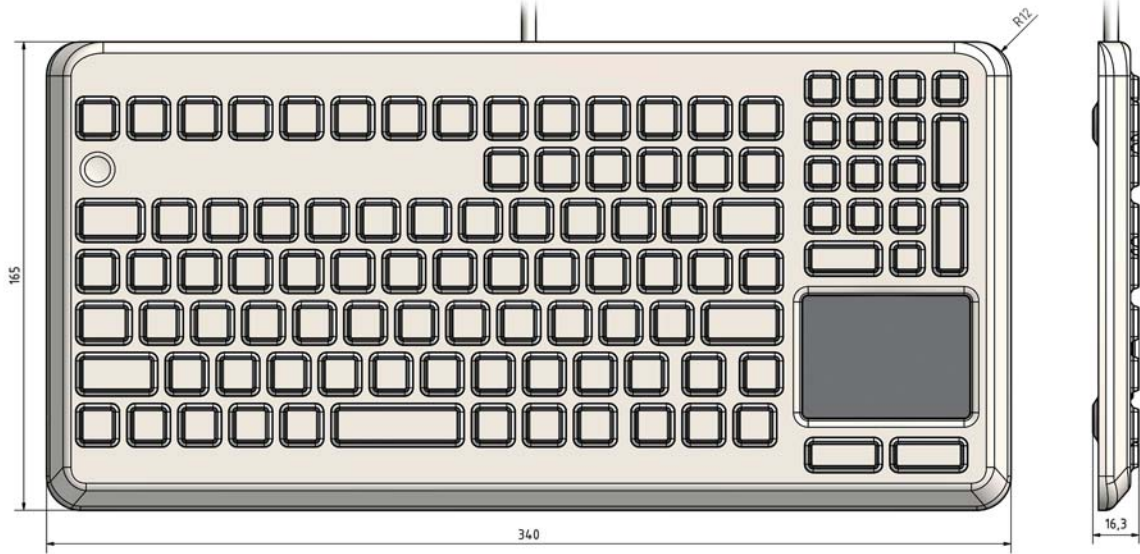


SPECIFICATION / OPTIONS / OPTIOT

- Rear side equipped for VESA mount (75 x 75 mm) with „push-out“ insert nuts for installing bolts
- The disengagable electronic system allows for a cleaning even while the system is running (ON/OFF Switch: push the button 3 sec.)



FI-Kieliversio

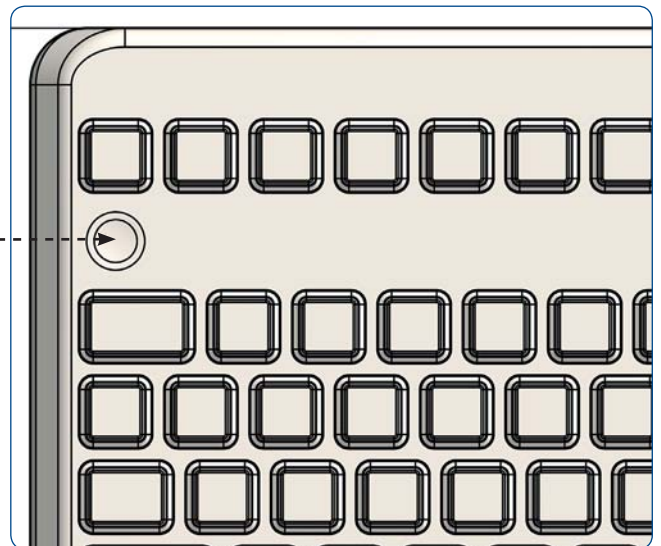

Version 012010

Änderungen und Irrtümer vorbehalten! / Errors and omissions exceptet